


## Product technical sheet

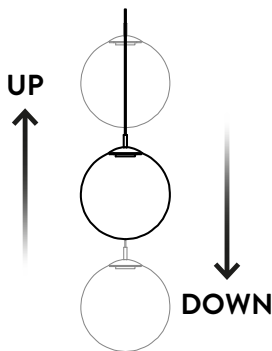

XXL1583 and MAX1583  
available with up and down system

### PIT<sup>®</sup>

**Design:** Cangini e Tucci

**Typology:** Hanging lamp, ceiling track, ceiling lamp, table lamp, floor lamp.

**Product code:** LU1580.1L, LU1585.1L, S1583.14.1L, S1583.16.1L, S1583.18.1L, 1583.1L, GIG1583.1L, XXL1583.1L, MAX1583.1L, 1589MX.43.3L, 1587.120.3L.

**Products details:** EUIPO's registered community design.

Additional compositions on demand.

Metal structure available: chrome, brushed chrome, matt white, matt black.

Coaxial low voltage electric cable in transparent or black.

Small single canopy available in: satin gold, satin rose gold, satin black nickel (without surcharge).

Lampholder available in: satin gold, satin rose gold (with surcharge), satin black nickel (without surcharge).

Metal finish for table and floor lamp available only in: satin gold, satin rose gold, satin black nickel (without surcharge).

Tracks and plates available only in: chrome, matt white, matt black, brushed chrome.

Aluminum lamp holder.

Products GIG, XXL and MAX in Fume color: 10% surcharge on the price of the coloured.

Compatible with **CASAMBI**

Driver included.

Dimmable: yes (phase-cut dimmer triac) - LED is replaceable by professional.

On demand: with UL components.

On demand: available with DALI.

Lumen indicated corresponds to the luminous intensity at the origin of the led board.

#### LED available for PIT:

LED 1 x 6W DIMM - 11,2-12,8 V - 500 mA - CRI >90 - 866 Lm - 144 Lm/W - 3 Step MacAdam - 2700°K.

LED 1 x 6W DIMM - 11,2-12,8 V - 500 mA - CRI >90 - 866 Lm - 144 Lm/W - 3 Step MacAdam - 3000°K.

#### LED available for PIT floor lamp:

LED 1 x 8,4W DIMM - 11,2-12,8 V - 700mA - CRI >90 - 1200 Lm - 144 Lm/W - 3 Step MacAdam - 2700°K.

LED 1 x 8,4W DIMM - 11,2-12,8 V - 700mA - CRI >90 - 1200 Lm - 144 Lm/W - 3 Step MacAdam - 3000°K.

#### LED available for PIT code MAX1583:

LED 1 x 8,4W DIMM - 22,4-24,8 V - 350 mA - CRI >90 - 1202 Lm - 144 Lm/W - 3 Step MacAdam - 2700°K.

LED 1 x 8,4W DIMM - 22,4-24,8 V - 350 mA - CRI >90 - 1202 Lm - 144 Lm/W - 3 Step MacAdam - 3000°K.

#### On demand products GIG1583 and XXL1583 can be required with 8,4W LED:

1 x 8,4W DIMM - 22,4-24,8 V 350 mA - CRI >90 - 1202 Lm 144 Lm/W - 3 Step MacAdam 2700°K or 3000°K.




**Glass colours:**



**Metal structure finish:**



**Galvanic finish on demand for single structures:**




**LU1580.1L**

Table lamp with dimmer push button

Glass Ø22 - H 50 cm

LED 1 x 6W DIMM - 500 mA - 2700 or 3000°K

CE IP20 ⚠️ ⏏️ 1m

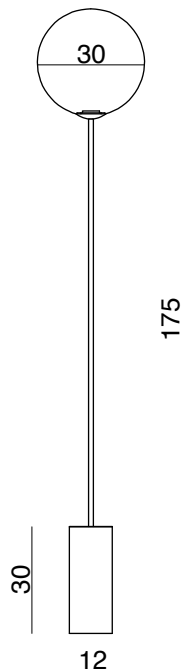


**LU1585.1L**

Floor lamp with dimmer push button

Glass Ø30 cm - H 175 cm

LED 1 x 8,4W DIMM - 700 mA - 2700 or 3000°K

CE IP20 ⚠️ ⏏️ 1m




### S1583.14.1L

Hanging lamp

Glass Ø14 cm - Cable 200 cm

LED 1 x 6W DIMM - 500 mA - 2700 or 3000°K

CE IP20 ⚠ 1m




### S1583.16.1L

Hanging lamp

Glass Ø18 cm - cable 200 cm

LED 1 x 6W DIMM - 500 mA - 2700 or 3000°K

CE IP20 ⚠ 1m




### S1583.18.1L

Hanging lamp

Glass Ø18 - Cable 200 cm

LED 1 x 6W DIMM - 500 mA - 2700 or 3000°K

CE IP20 ⚠ 1m




## 1583.1L

Hanging lamp

Glass Ø22 cm - Cable 200 cm

LED 1 x 6W DIMM - 500 mA - 2700 or 3000°K

CE IP20 ⚠ 1m



## GIG1583.1L


Hanging lamp

Glass Ø26 cm - cable 200 cm

LED 1 x 6W DIMM - 500 mA - 2700 or 3000°K

CE IP20 ⚠ 1m

\*On demand: can be required with:  
LED 1 x 8,4W DIMM - 22,4-24,8 V  
350 mA - CRI >90 - 1202 Lm - 144 Lm/W  
3 Step MacAdam - 2700°K or 3000°K



## XXL1583.1L


Hanging lamp

Glass Ø30 - Cable 200 cm

LED 1 x 6W DIMM - 500 mA - 2700 or 3000°K

CE IP20 ⚠ 1m

\*On demand: can be required with:  
LED 1 x 8,4W DIMM - 22,4-24,8 V  
350 mA - CRI >90 - 1202 Lm - 144 Lm/W  
3 Step MacAdam - 2700°K or 3000°K




## MAX1583.1L

Hanging lamp

Glass Ø36 cm - Cable 200 cm

LED 1 x 8,4W DIMM - 350 mA - 2700 or 3000°K

CE IP20 ⚠ 1m

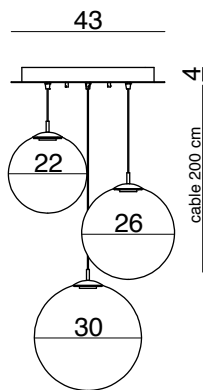


## 1589MX.43.3L

Ceiling lamp

Glass Ø22-26-30 cm - Cable 200 cm

LED 3 x 6W DIMM - 500 mA - 2700 or 3000°K

CE IP20 ⚠ 1m

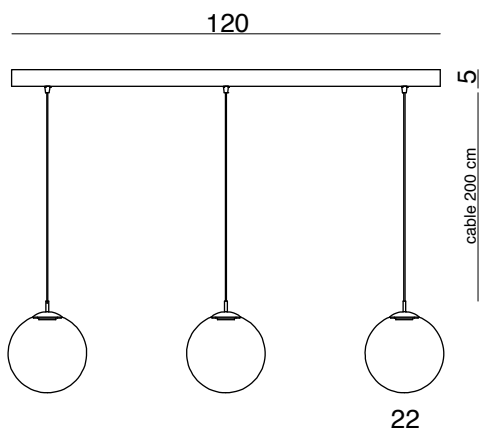

## 1587.120.3L

Ceiling track

Glass 3x Ø22 cm - Cable 200 cm

LED 3 x 6W DIMM - 500 mA - 2700 or 3000°K

CE IP20 ⚠ 1m