
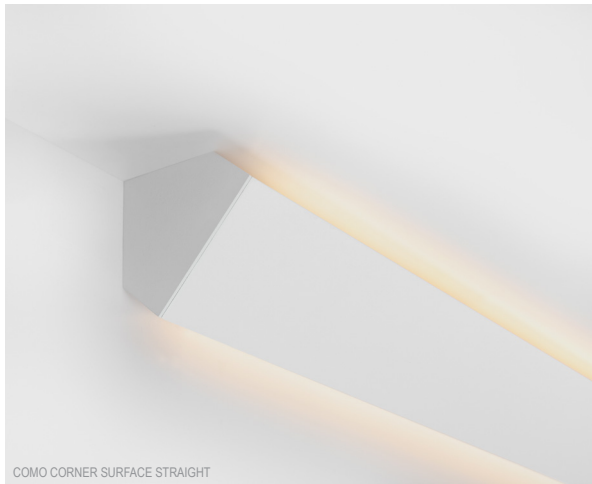



Date
Customer
Project
Type

Como Corner Surface

Perfect for low ceilings, renovation projects and newly built construction projects, Como corner is a simple design that hides it all. Designer Dirk Wynants created this linear lighting family that offers ambient light and visual comfort. Horizontally side-to-side, where wall meets ceiling, or in the middle of the wall, or vertically in a corner, top to bottom. Como corner's two designs will blend in nicely in a residential or office space.

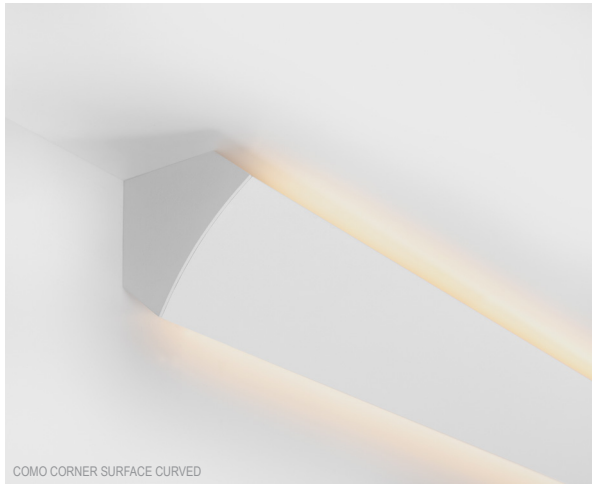

Como Corner Surface

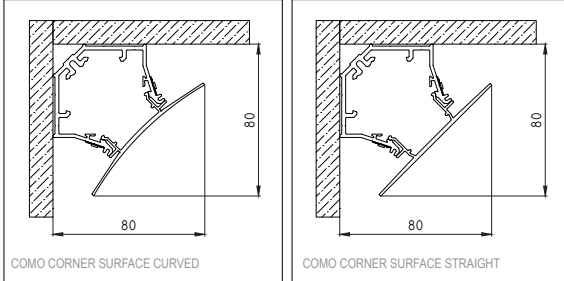

Base Profile

Dimensions	77mm x 77mm (h x w)
Base thickness	1.5mm
Mounting	Wall, Ceiling
Indoor/Outdoor	Indoor
Finish	Anodised: aluminium
IP rating	IP20
Glow Wire Test	960°
CRI	90+
Warranty	5 years on LED lamps, 2 years on drivers

Front Cover

Finish*	Fine structured scratch resistant powder coating: white structure
*Can be repainted by client in the colour of their choosing: see manual page 10 for paint instructions	


Lighting Modules

Linear LED Strip 24V


LED type	LED Strip - diffusor included
Colour temperature	2700K, 3000K, 4000K
Dimming	Non-dimmable, 1-10V, Dali/Pushdim



Finish Information




aluminium
(anodised)




white structure
(powder coating)

Base Profile




93600005 COMO CORNER BASE ALU/M

Endplate




93600409 COMO CORNER CURVED ENDPLATE WHITE STRUC


Profile Cover



93600209 COMO CORNER CURVED COVER WHITE STRUC/M




93600309 COMO CORNER STRAIGHT ENDPLATE WHITE STRUC




93600109 COMO CORNER STRAIGHT COVER WHITE STRUC/M

Connection



93600500 COMO CORNER 180° CONNECTION

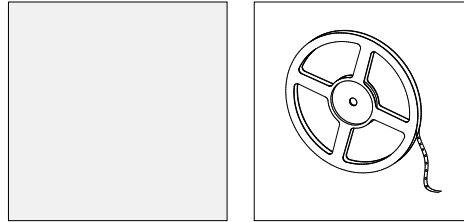

Linear LED Strip 24V

1000lm/m

	2700K	3000K	4000K
not mounted (roll 3m)*	93000032	93000033	93000034
not mounted (roll 5m)*	93000016	93000017	93000018

2000lm/m

	2700K	3000K	4000K
not mounted (roll 3m)*	93000035	93000036	93000037
not mounted (roll 5m)*	93000026	93000027	93000028

Lamp type	LED STRIP - diffuser included		
	1000lm/m	2000lm/m	
Delivered lumens	2700K	715lm/m	1122lm/m
	3000K	846lm/m	1262lm/m
	4000K	814lm/m	1267lm/m
Connected load	2700K	14.4W/m	14.4W/m
	3000K	14.4W/m	14.4W/m
	4000K	14.4W/m	14.4W/m
Efficacy	2700K	50lm/W	78lm/W
	3000K	59lm/w	88lm/W
	4000K	57lm/W	88lm/W
Binning	3SDCM		
Lifetime	L80 B10 @50000hrs		

DRIVERS

93600501	LED DRIVER 24V 60W
93600503	LED DRIVER 24V 60W 1-10V
93600505	LED DRIVER 24V 70W DALI
93600502	LED DRIVER 24V 100W
93600504	LED DRIVER 24V 100W 1-10V
93600506	LED DRIVER 24V 100W DALI
93600507	LED DRIVER 24V 150W
93600508	LED DRIVER 24V 150W 1-10V
93600509	LED DRIVER 24V 150W DALI

SUPPLEMENTS

*93600510	LEDSTRIP 24V CONNECTION
93600512	CASAMBI DIM MODULE DALI