

Date	_____
Customer	_____
Project	_____
Type	_____

SLD35 Surface Wall

Light lines are a beautiful way to highlight the architectural elements of a space. SLD35, formerly SL micro, can easily be your luminaire of choice for this effect. In fact, so can our entire SLD family. Available in ceiling mounted, suspended and recessed versions.



SLD35 SURFACE WALL - SILVER BRONZE



SLD35 SURFACE WALL - BRONZE




SLD35 SURFACE WALL - CHAMPAGNE



SLD35 SURFACE WALL - WHITE STRUCTURE

SLD35 Surface Wall

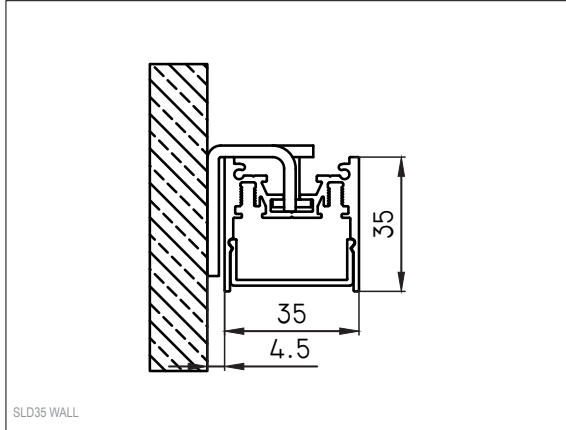

Base Profile

SLD35	
Dimensions	35mm x 35mm (h x w)
Base thickness	2mm
Mounting	Wall
Indoor/Outdoor	Indoor
Finish (RAL finish available on request)	Anodised: aluminium Brushed anodised: bronze, champagne, silver bronze Fine structured scratch resistant powder coating: black, white
Glow Wire Test	960°
CRI	90+
Warranty	5 years

Diffusor

Type	PMMA
------	------

Lighting Modules

Linear LED Strip 24V	
LED type	LED Strip
Colour temperature	2700K, 3000K, 4000K
Dimming	Non-dimmable, 1-10V, 0-10V, Dali/Pushdim

Finish Information

(RAL finish available on request)



aluminium
(anodised)



bronze
(brushed anodised)




champagne
(brushed anodised)



silver bronze
(brushed anodised)




black structure
(powder coating)




white structure
(powder coating)

Base Profile




- 93460005** SLD35 PROFILE ANO ALU, POLY IN PMMA/M
- 93460018** SLD35 PROFILE ANO BRONZE, POLY IN PMMA/M
- 93460017** SLD35 PROFILE ANO CHAMPAGNE, POLY IN PMMA/M
- 93460006** SLD35 PROFILE ANO SILVER BRONZE, POLY IN PMMA/M
- 93460932** SLD35 PROFILE BLACK STRUC, POLY IN PMMA/M
- 93460905** SLD35 PROFILE WHITE STRUC, POLY IN PMMA/M

Fixation / Mounting




- 93460161** SLD35 LATERAL WALL BRACKET ANO
- 93468161** SLD35 LATERAL WALL BRACKET BLACK STRUC
- 93469161** SLD35 LATERAL WALL BRACKET WHITE STRUC

Endplate




- 93460181** SLD35 ENDPLATE ALU
- 93468118** SLD35 ENDPLATE BRONZE
- 93468117** SLD35 ENDPLATE CHAMPAGNE
- 93468106** SLD35 ENDPLATE SILVER BRONZE
- 93468181** SLD35 ENDPLATE BLACK STRUC
- 93469181** SLD35 ENDPLATE WHITE STRUC


Connection



- 93460050** SLD35 CONNECTION 180°



- 93460060** SLD35 CONNECTION 90°



Linear LED Strip 24V

1000lm/m

	2700K	3000K	4000K
mounted/m	93000540	93000541	93000542

2000lm/m


	2700K	3000K	4000K
mounted/m	93000004	93000005	93000006

Lamp type	LED STRIP - diffuser included		
	1000lm/m	2000lm/m	
Delivered lumens	2700K	652lm/m	1142lm/m
	3000K	695lm/m	1166lm/m
	4000K	632lm/m	1110lm/m
Connected load	2700K	10.8W/m	18.9W/m
	3000K	10.8W/m	18.9W/m
	4000K	9.6W/m	16.6W/m
Efficacy	2700K	60lm/W	60lm/W
	3000K	64lm/w	62lm/W
	4000K	66lm/W	67lm/W
Binning	3SDCM		
Lifetime	L80 B10 @50000hrs.		

DRIVERS

12405830	LED GEAR 24V 20W
12402030	LED GEAR 24V 20W 1-10V
12409730	LED DRIVER 24V 60W NON-DIM/0/1-10V
12409830	LED DRIVER 24V 100W NON-DIM/0/1-10V
12409930	LED DRIVER 24V 150W NON-DIM/0/1-10V
13550830	LED GEAR 24V 100W PUSHDIM/DALI

SUPPLEMENTS



93470504 SLD35 LEDSTRIP 24V CONNECTION WALL