


Product technical sheet



# FREQUENCY®

Design: Marcantonio

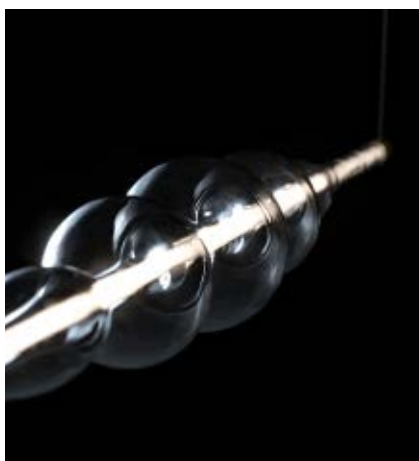

Typology: Hanging lamp, wall lamp

Product code: AP1551, 1553.OR.1, 1553.OR.2, GIG1553.OR.2, MINI1553.VE, 1553.VE, 1555.VE with shuko plug.

**Products details:** EUIPO's registered community design.  
 Coaxial low voltage electric cable in transparent.  
 Metal structure finish available: chrome, satin gold, satin black nickel.  
 Structure in galvanized brass.  
 Driver included.  
 Dimmable: yes - LED is replaceable by the manufacturer.  
 On demand: with UL components for USA +10%

**LED available for FREQUENCY suspension L128 cm:**

LED 21,6 W DIMM - 3245 Lm - 150,2 Lm/W - 1080 mA - CRI 95 - 20V - 2700°K or 3000°K  
 Lumen indicated corresponds to the luminous intensity at the origin of the LED light bar.

LED 21,6 W DIMM - 1350 Lm - 62,5 Lm/W - 1080mA - CRI 95 - 20V - 2700°K or 3000°K  
 Lumen luminous intensity with transparent glass.

**LED available for FREQUENCY suspension L150 cm:**

LED 24,48 W DIMM - 3677 Lm - 150,2 Lm/W - 1080 mA - CRI 95 - 20V - 2700°K or 3000°K  
 Lumen indicated corresponds to the luminous intensity at the origin of the led light bar.

LED 24,48 W DIMM - 2400-2600 Lm - 100-105 Lm/W - 1080mA - CRI 95 - 20V - 2700°K or 3000°K  
 Lumen luminous intensity with transparent glass.

**LED available for FREQUENCY L63 cm:**

LED 10,8 W DIMM - 1622 Lm - 150,2 Lm/W - 540 mA - CRI 95 - 20V - 2700°K or 3000°K  
 Lumen indicated corresponds to the luminous intensity at the origin of the led light bar.

LED 10,8 W DIMM - 675 Lm - 62,5 Lm/W - 540mA - CRI 95 - 20V - 2700°K or 3000°K  
 Lumen luminous intensity with transparent glass.


**Glass colours:**




**Bicolored finish:**



**Metal structure finish:**



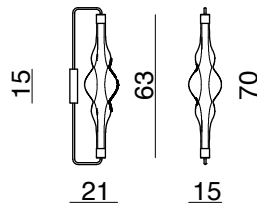

## AP1551


Wall lamp

L15 - P21 - H70 cm

LED 10,8 W DIMM - 1622 Lm - 150,2 Lm/W -  
540 mA - CRI 95 - 20V - 2700°K or 3000°K

Lumen indicated corresponds to the luminous intensity  
at the origin of the led light bar.

CE IP20 ⚠ 1m

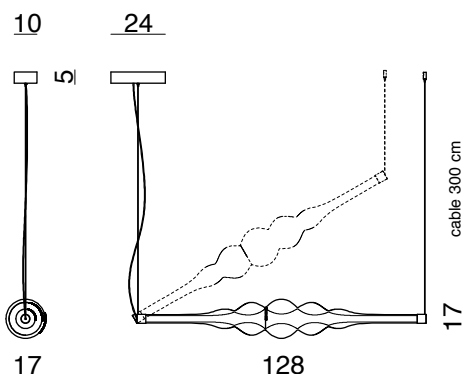

## 1553.OR.1


Hanging lamp

L128 cm - P17 - H17 cm - Cable 300 cm

LED 21,6 W DIMM - 3245 Lm - 150,2 Lm/W -  
1080 mA - CRI 95 - 20V - 2700°K or 3000°K

Lumen indicated corresponds to the luminous intensity  
at the origin of the LED light bar.

CE IP20 ⚠ 1m

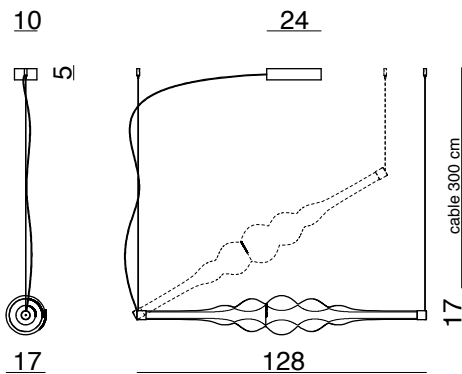

## 1553.OR.2


Hanging lamp

L128 cm - P17 - H17 cm - Cable 300 cm

LED 21,6 W DIMM - 3245 Lm - 150,2 Lm/W -  
1080 mA - CRI 95 - 20V - 2700°K or 3000°K

Lumen indicated corresponds to the luminous intensity  
at the origin of the LED light bar.

CE IP20 ⚠ 1m

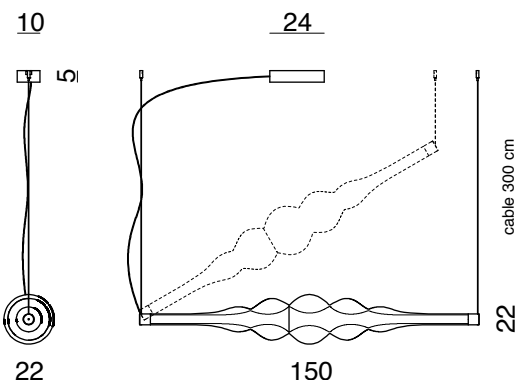

## GIG1553.OR.2


Hanging lamp

L150 - P22 - H22 cm - Cable 300 cm

LED 24,48 W DIMM - 3677 Lm - 150,2 Lm/W -  
1080 mA - CRI 95 - 20V - 2700°K or 3000°K

Lumen indicated corresponds to the luminous intensity  
at the origin of the led light bar.

CE IP20 ⚠ 1m

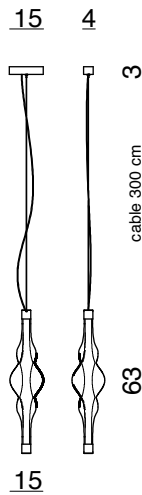

## MINI1553.VE


Hanging lamp

L15 - P15 - H63 cm - Cable 300 cm

LED 10,8 W DIMM - 1622 Lm - 150,2 Lm/W -  
540 mA - CRI 95 - 20V - 2700°K or 3000°K

Lumen indicated corresponds to the luminous intensity  
at the origin of the led light bar.

CE IP20 ⚠ 1m

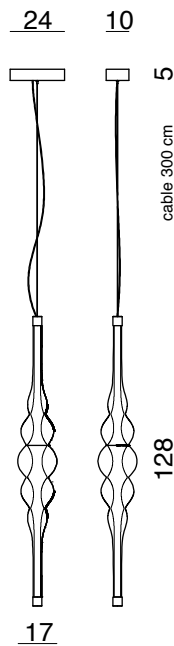

## 1553.VE


Hanging lamp

L17 - P17 - H128 cm - Cable 300 cm

LED 21,6 W DIMM - 3245 Lm - 150,2 Lm/W -  
1080 mA - CRI 95 - 20V - 2700°K or 3000°K

Lumen indicated corresponds to the luminous intensity  
at the origin of the LED light bar.

CE IP20 ⚠ 1m

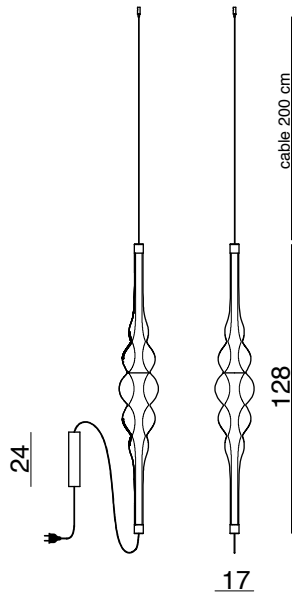

## 1555.VE with shuko plug

Hanging lamp

L17 - P17 - H128 cm - Cable 200 cm

LED 21,6 W DIMM - 3245 Lm - 150,2 Lm/W -  
1080 mA - CRI 95 - 20V - 2700°K or 3000°K

Lumen indicated corresponds to the luminous intensity  
at the origin of the LED light bar.

CE IP20 ⚠ 1m