


Titanium

Suspended Starlight

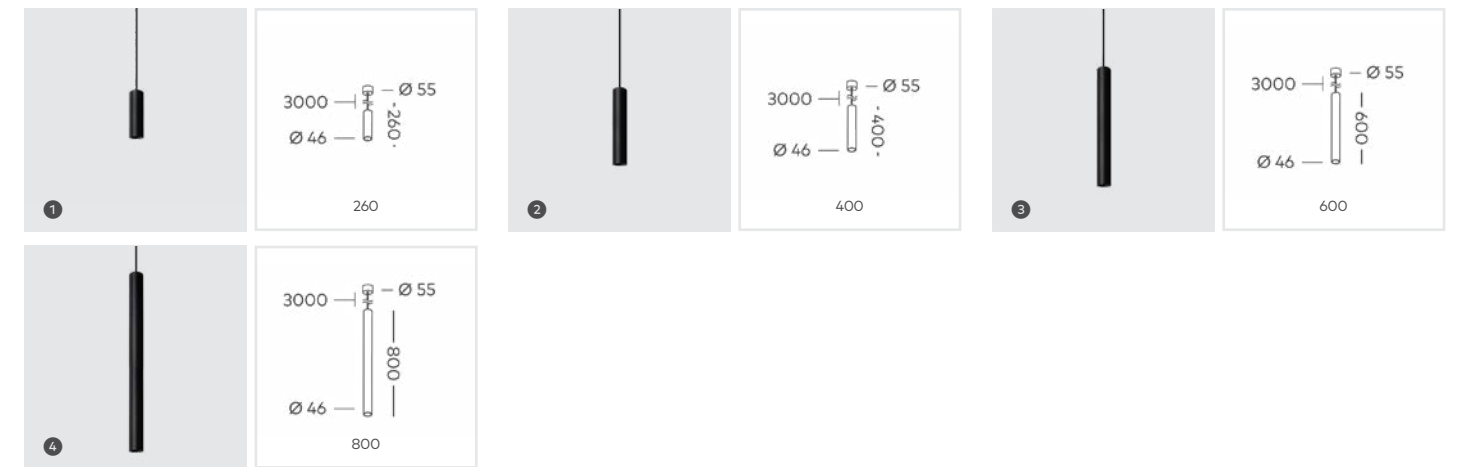



		LED Power	Lumens (at 3000K)	Beam	Weight
1	260 Suspended Starlight	5W (150mA)	468lm	36° 50°	557g
2	400 Suspended Starlight	5W (150mA)	468lm	36° 50°	791g
3	600 Suspended Starlight	5W (150mA)	468lm	36° 50°	1.1kg
4	800 Suspended Starlight	5W (150mA)	468lm	36° 50°	1.4kg

Key Information		Design		Performance		Driver	
Mounting	Ceiling Suspended	Product Family	Titanium	Lumen efficacy	Up to 77lm/W	Phase Cut	Built in
Finish	<input type="checkbox"/> Textured Black <input type="checkbox"/> Textured White <input type="checkbox"/> Textured Black/Gold <input type="checkbox"/> Textured White/Gold <input type="checkbox"/> Textured Black/White <input type="checkbox"/> Textured White/Black	Material	Powder Coated Aluminium	CRI (Ra/R9)	92+ (R9: >50)	DALI	Remote
	LED CCT	IP Rating	IP20	UGR	<13		
	<input type="checkbox"/> 2700K <input type="checkbox"/> 3000K <input type="checkbox"/> 4000K	Class Rating	Class I	Lifetime (Ta 25°C)	>55,000h L90B10		
	Warranty	5 Year	Cable Length	3000mm	Ambient Temperature Range	10°- 30°C	
				SDCM	≤2		
				COI Compliance model requirements	4000K		

Learn about the Titanium Series in more detail.

Visit the website for the Titanium Series Product Guide.

unios.com/titaniumguide

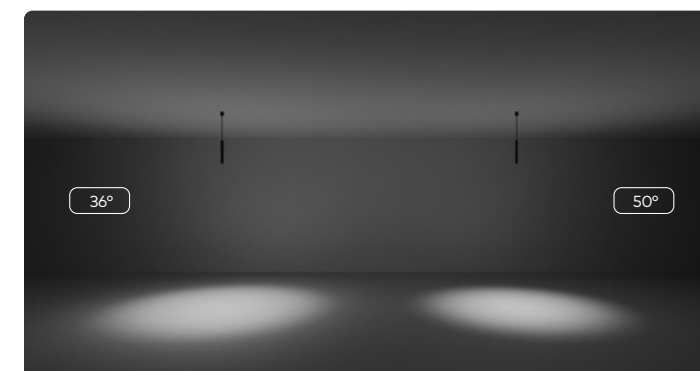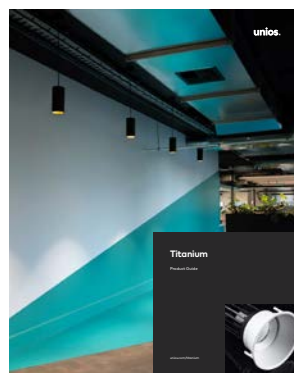

Notes

Luminaire, surface mounted canister and suspension kit sold separately.





Titanium



Suspended Starlight



Titanium
Suspended Starlight
260
Textured Black
Tony Fruit

Titanium
Suspended Starlight
600
Textured Black
Tre Dining