



# STALIK (LX-SK)

TYPE: LX-SK-


## KEY FEATURES

- High-performance lumen output
- UGR<19
- Highly effective noise absorption
- 3 sizes and 77 wool colors
- 9' / 2.740mm length of black woven power cable per fixture
- IES photometric files available
- Acoustic vertical baffle version available


## OPTIONAL EXTRAS

- Additional options available upon request:
- POE
  - Bluetooth controller (US & EU only)
  - Tunable White output
  - White canopy and power cord
  - BABA Act Certificate

## SIZE, OUTPUT AND WEIGHT

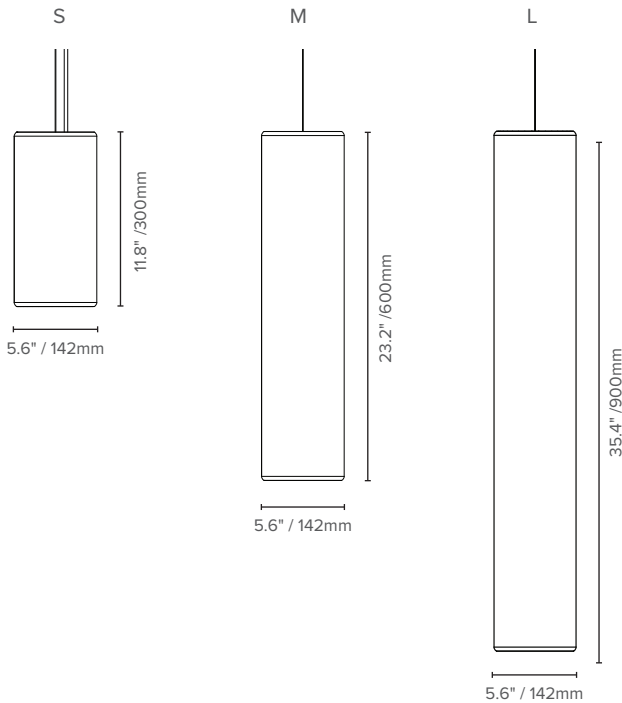

## LUMINOUS INTENSITY DISTRIBUTION

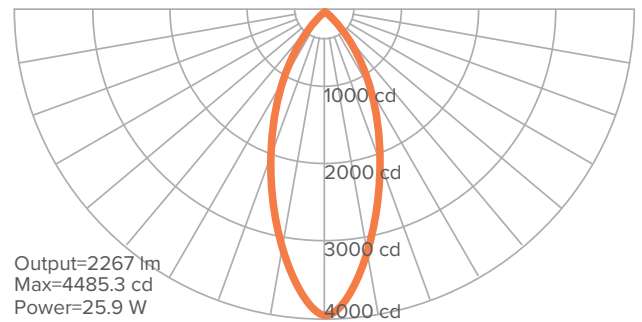

	S	M	L
Delivered Lumen Output		2267 lm	
Wattage		25.9 W	
Efficacy		87.5 lm/W	
CRI		90+	
UGR		<19	
Beam Angle		45°	
CCT		3000/3500/4000 K	
Weight	3.3 lbs / 1.5 Kg	4 lbs / 1.8 Kg	4.4 lbs / 2 Kg

## ORDER CODE

EXAMPLE: LX - SK - M - 1N - 40 - G - RD

(Luxbox Stalik, Size M (5.6" x 23.2" / 142mm x 600mm), Wool option 1N, 4000K, Global 220-240V 1% dimming DSI/DALI, Remote driver)

LX - SK									
PRODUCT CODE	SIZE	SHADE COLOR	COLOR TEMP		REGION / DIMMING		DRIVER TYPE		
SK	S	5.6" x 11.8" / 142 x 300mm	Use color codes as shown on pg.2	30	3000K	UNV	Universal 110 - 277V / 0-10V 1% Dimming (North America)	CD	Canopy concealed driver (UNV/North America)
	M	5.6" x 23.2" / 142 x 600 mm		35	3500K			RD	Remote driver (UNV or G)
	L	5.6" x 35.4" / 142 x 900 mm		40	4000K	G*	Global 220-240V 1% dimming DSI/DALI		
	A	Acoustic Vertical Baffle							

\* Global (G) dimming type is available with Remote Driver (RD) only.

Luxbox reserves the right to change the specification, material and colors at any time without notice. Standard warranty terms and conditions apply. All rights reserved © All dimensions and values on specification sheet are nominal. March 2025. LX-Stalik-Spec-Sheet\_A4 v1.3



LUXBOX USA INC  
(P)+1 (415) 871 0448 × USA@LUXBOX.COM  
WWW.LUXBOX.COM






# STALIK (LX-SK)

TYPE: LX-SK-

## WOOL UPHOLSTERED

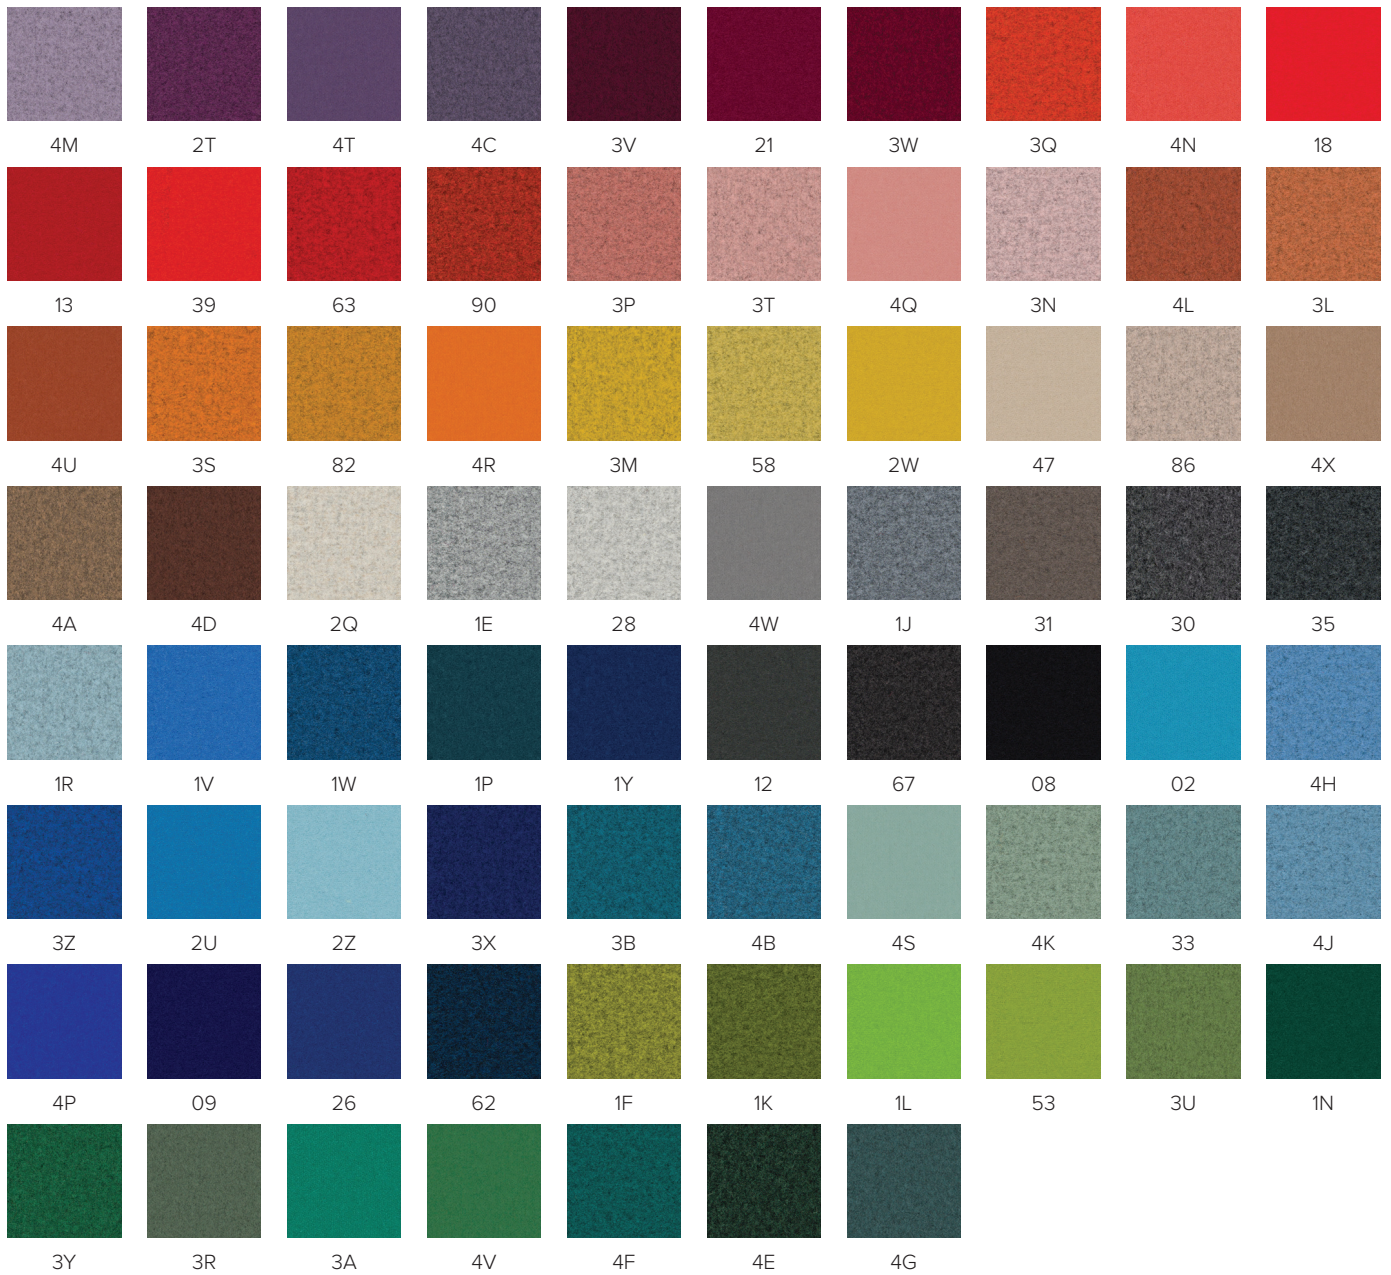

Luxxbox reserves the right to change the specification, material and colors at any time without notice. Standard warranty terms and conditions apply. All rights reserved © All dimensions and values on specification sheet are nominal. March 2025. LX-Stalík-Spec-Sheet\_A4 v1.3



LUXXBOX USA INC  
(P)+1 (415) 871 0448 × USA@LUXXBOX.COM  
WWW.LUXXBOX.COM





# STALIK (LX-SK)


TYPE: LX-SK-

## PHOTOMETRICS

### LIGHT SOURCE SPECIFICATIONS

	S / M / L
Delivered Lumen Output	2267 lm
Wattage	25.9 W
Efficacy	87.5 lm/W
CRI	90+
UGR	<19
Beam Angle	45°
CCT	3000/3500/4000 K

### LUMINOUS INTENSITY DISTRIBUTION

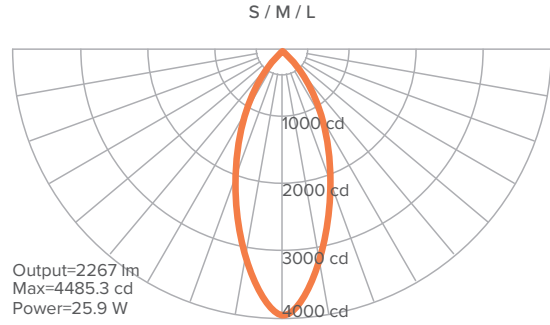




## DRIVER INFORMATION

		WATTAGE	MAX VOLTAGE (V)	COMPLIANCE
<b>UNIVERSAL (UNV)</b> 0-10V - 10% dimming 110 - 277VAC <i>(North America)</i>	S	28.5 W	28-42VDC	
	M			
	L			
<b>GLOBAL (G)</b> 1% dimming DSI DALI 220 - 240VAC	S	28.5 W	28-42VDC	
	M			
	L			

## CANOPY INFORMATION

Please note power cord and canopy will always be supplied in black unless specified otherwise.

S / M / L	UNV (North America)		G
	CD	RD	RD
	CD6	SA6	SB2

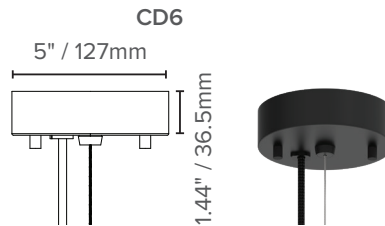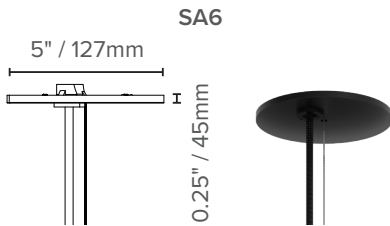

Luxxbox reserves the right to change the specification, material and colors at any time without notice. Standard warranty terms and conditions apply. All rights reserved © All dimensions and values on specification sheet are nominal. March 2025. LX-Stalik-Spec-Sheet\_A4 v1.3



LUXXBOX USA INC  
 (P)+1 (415) 871 0448 × USA@LUXXBOX.COM  
 WWW.LUXXBOX.COM





# STALIK (LX-SK)

TYPE: LX-SK-

## MATERIAL SPECIFICATIONS

<b>COLOR FASTNESS TO LIGHT:</b>	ISO 105-B02-1994 Rating: 6-7
<b>FIRE TEST:</b>	AS 1530.3 / ISO 9705: Group 1 / GB8624 B1 / ASTM E-84-14 (Class A, FSI:20 - SDI:450) / BS EN13501-1:2007+A1:2009 (B-s1, d0)
<b>ENVIRONMENTAL:</b>	PET: GreenTag Certification / GreenRate: Level A
<b>THERMAL TRANSITION:</b>	ASTM C518-2010. R- Value = 0.30 m <sup>2</sup> K/W
<b>SOUND ABSORPTION:</b>	AS ISO 354 – 2006 / Noise reduction coefficient (NRC) = 0.85
<b>VOC EMISSIONS:</b>	ASTM D5116 Rate: < 0.01 mg/m <sup>2</sup> /hr (7 days)


Please note some of these certificates will apply to specific colors.

## PRODUCT ACOUSTIC PROPERTIES


Testing and post analysis procedures were carried out in accordance with the references detailed below:

<b>AS ISO 354-2006 (R2016)</b>	Acoustics—Measurement of sound absorption in a reverberation room
<b>AS ISO 11654—2002</b>	Rating of sound absorption—Materials and systems
<b>ASTM C423-17</b>	Standard Test Method for Sound Absorption and Sound Absorption Coefficients by the Reverberation Room Method
<b>ASTM E795-16</b>	Standard Practices for Mounting Test Specimens During Sound Absorption Tests
<b>ISO 20189</b>	Screens, furniture and single objects intended for interior use – Rating of sound absorption and sound reduction of elements based on laboratory measurements.

SABINS (FT <sup>2</sup> )	Frequency (Hz)	Sound Absorption Coefficient	S	M	L
	125	0.69	1.11	2.08	3.12
250	0.92	1.49	2.77	4.16	
500	0.96	1.55	2.89	4.34	
1000	0.76	1.23	2.29	3.44	
2000	0.79	1.28	2.38	3.57	
4000	0.74	1.19	2.23	3.35	

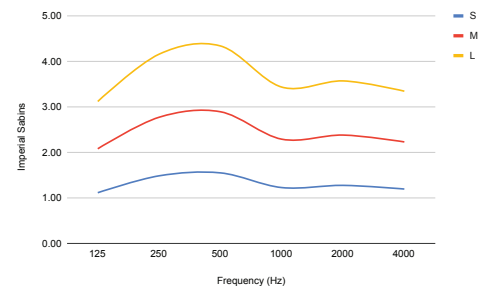

SABINS (M <sup>2</sup> )	Frequency (Hz)	Sound Absorption Coefficient	S	M	L
	125	0.69	0.10	0.19	0.29
250	0.92	0.14	0.26	0.39	
500	0.96	0.14	0.27	0.40	
1000	0.76	0.11	0.21	0.32	
2000	0.79	0.12	0.22	0.33	
4000	0.74	0.11	0.21	0.31	

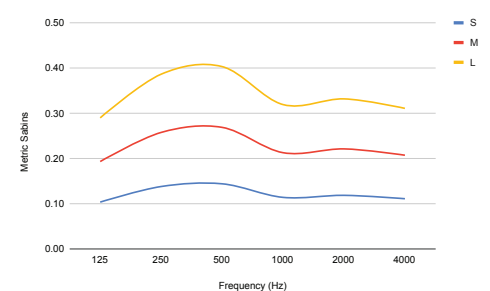

The Sabin data shown above is in accordance with the latest International Standards for the rating of sound absorption and reduction. This is different from the classic methodology, which includes the calculation of the Noise Reduction Coefficient (NRC), the Sound Absorption Average (SAA), the Weighted Sound Absorption Coefficient (**aw**) and the Sound Absorption Class (SAC). However, to make it easier to compare against other products, we are including that information on the table on the right, which was calculated using the Horizontal Floor Area method. Fully detailed test reports are available upon request.

<b>NRC</b>	0.85
<b>SAA</b>	0.83
<b>aw</b>	0.85

Luxbox reserves the right to change the specification, material and colors at any time without notice. Standard warranty terms and conditions apply. All rights reserved © All dimensions and values on specification sheet are nominal. March 2025. LX-Stalik-Spec-Sheet\_A4 v1.3



LUXXBOX USA INC  
(P)+1 (415) 871 0448 × USA@LUXXBOX.COM  
WWW.LUXXBOX.COM






# STALIK (LX-SK)


TYPE: LX-SK-

## PRODUCT DIMENSIONS

### TOP VIEW

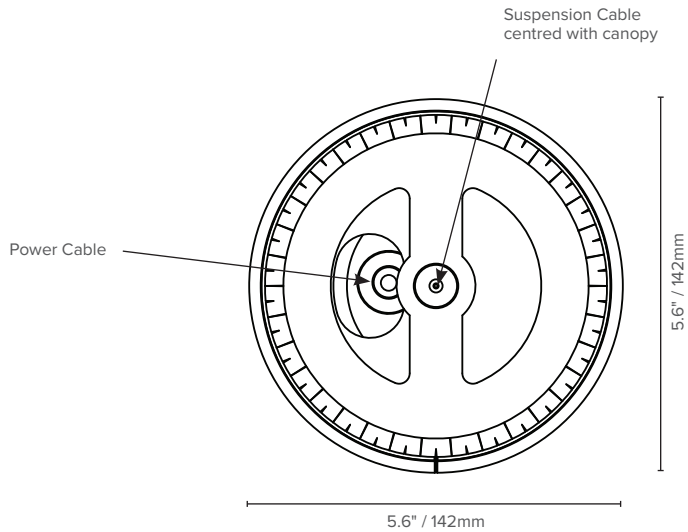

### SIDE VIEWS

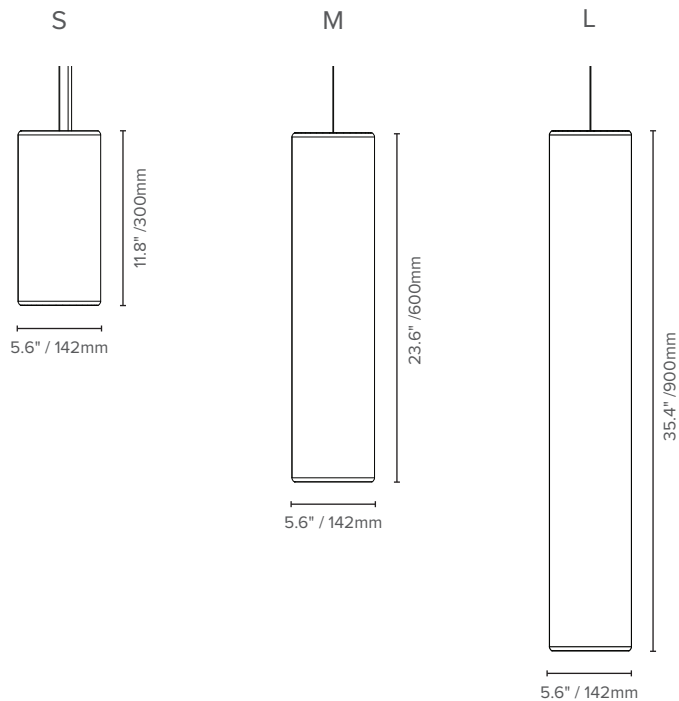

Luxbox reserves the right to change the specification, material and colors at any time without notice. Standard warranty terms and conditions apply. All rights reserved © All dimensions and values on specification sheet are nominal. March 2025. LX-Stalik-Spec-Sheet\_A4 v1.3



LUXBOX USA INC  
(P)+1 (415) 871 0448 × USA@LUXBOX.COM  
WWW.LUXBOX.COM

